



	Concrete/Masonry	Backer Board	Terrazzo	Mortar Bed - Plater	Resilient Flooring	Ceramic Tile	Ext. Grade	Gypsum
Self Leveling Underlayment	●	●		●		●	●	
Sill & Wall Mud #821	❖			❖		●	● [§]	●
Floor Mud #833	❖	❖		❖	❖	❖		
Crack Suspension SC1100	❖	❖	❖	❖		❖		
Waterproofing SC1132	❖	❖	❖	❖		❖	●	●
CSM40 Crack Suppression	❖	❖	❖	❖	●	❖	●	
CSM90 Sound Control	❖	❖	❖	❖	●	❖	●	

Metal Lath Required § Interior Only ● Interior & Exterior ❖

Since 1978, SGM, Inc. has been serving the building industry specializing in the development and production of maintenance-free materials for the flooring and building industry. The first step in any type of installation is surface preparation. From wood to terrazzo, ceramic tile to dimension stone, SGM can fulfill all your surface preparation needs with our full line of products for the flooring professional.



1502 SW 2nd Place
Pompano Beach, FL 33069

product guide to


SURFACE PREPARATION

underlayments for the floor covering industry

www.sgm.cc


1.800.641.9247



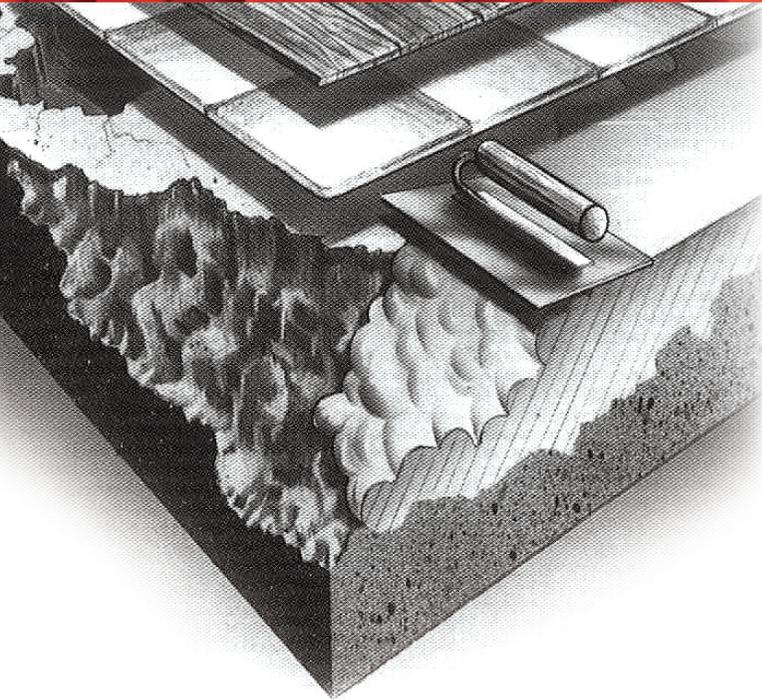


SILL & WALL MUD #821

Factory blend of Portland cement, sand and light weight fillers. Designed for use as a light weight plaster substrate bedding (browncoat) which does not place additional dead load on structural members. Eliminates costly job-site mixing of sand/cement mixes.



MORTAR MIX

SGM mortar mix is a factory blend of special masonry cement and aggregates designed for laying bricks, concrete masonry units and stone.



SOUTHCRETE™ 45 CONCRETE BONDING AGENT

Self Level Primer. Poly-vinyl acetate emulsion that can be used as a primer for bonding over various substrates such as concrete, stucco, brick and stone. May also be used as a direct additive in lieu of water in Portland cement/sand mixes to control hydration and prevent moisture loss.



SOUTHCRETE™ 1132

One Part Liquid Waterproofing & Anti-Fracture Membrane

This one-part liquid waterproofing is a water based mix of polymers that offers a non-toxic, solvent free, elastomeric waterproofing membrane for use prior to the installation of ceramic tile and dimension stone over a variety of surfaces. Applied by brush or roller, Southcrete 1132 waterproof produces a continuous moisture barrier with outstanding adhesion to concrete slabs, concrete block, cured Portland cement, mortar beds, tile backer board, and exterior grade plywood.




SOUTHCRETE™ 1100

Crack Suppressant & Waterproofing Liquid applied, single component, moisture-cured polyurethane elastomer. Meets the requirements of the Ceramic Tile Institute for waterproofing under thin set mortar.




FLOOR MUD #833

Portland Cement Mortar Bed. Unique blend of Portland cement, graded silica and additives, developed to produce a suitable dense substrate for ceramic tile and dimension stone.



CSM SYSTEM PRIMER

A necessary component of the SGM Membrane System, this safe, non-flammable primer allows for more time and establishes a permanent bond within 48 hours. Pre-mixed formula will not re-emulsify and does not call for thinning.

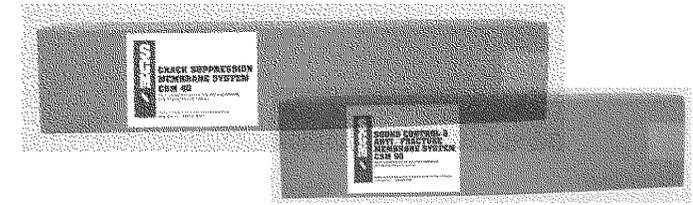

CSM 90 SOUND CONTROL MEMBRANE

CSM 90 is a self-adhering "peel-and-stick" sound control membrane designed for use in multi-family, multi-story residential apartments, condominiums, airports, restaurants and shopping malls.

CSM 40 CRACK SUPPRESSION & SOUND PROOFING SYSTEM

CSM 40 is a self-adhering "peel-and-stick" crack isolation membrane for use under thin and medium bed installations.

